



HUNTER SERIES SOLAR MODULES 440-460W

120
Cells
Mono-Perc
MBB



Overview

A fully certified, premium quality and high efficiency module made with A Grade materials manufactured in Turkey. Guaranteed positive tolerance of up to 5W.



- QUALITY**
- ISO 9001 CERTIFICATION
 - ISO 10002 CERTIFICATION
 - IEC 61215
 - PIN-UP TECHNOLOGY LAMINATION
 - NDC (NON-DESTRUCTIVE CUTTING)
 - MICRO GAP
 - EL CONTROL IN 3 LOCATIONS



- COMPONENTS**
- CERTIFIED SUPPLIERS
 - STRICT CRITERIA FOR THE SELECTION OF CELLS (EUROPE AND ASIA)
 - MC4-EVO2 TYPE CONNECTORS OR COMPATIBLE



- TECH**
- IEC 61215 AND 61730 PARTS II
 - LOAD RESISTANCE -5400 PA
 - HAIL IMPACT RESISTANCE CLASS 4
 - MAX VOLTAGE 1500V



- WARRANTY**
- PRODUCT: 12 YEARS
 - 1 YEAR: MONO (98%)
 - 10 YEARS: 90% / 25 YEARS UP TO: 82% (LINEAR)




- ENVIRONMENT**
- REGULATED CARBON FOOTPRINT
 - ISO 45001 AND ISO 14001 STD.




- PRODUCT**
- CLASS 440 - 460 WP -0/+4.99 WP
 - MONO CELLS
 - 120 CELLS PERC MODULE
 - 10 BB

Linear Performance Warranty

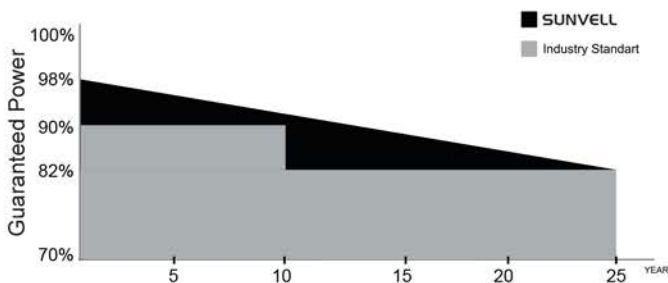

I-V Curve

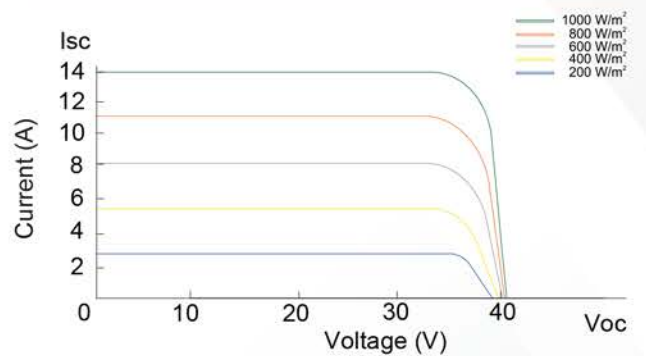

Solar Module

Electrical Characteristics


Rated Power	MIR440 120C/M	MIR445 120C/M	MIR450 120C/M	MIR455 120C/M	MIR460 120C/M
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W
Maximum Power Voltage (Vmp)	33.72	33.82	33.91	34.06	34.20
Maximum Power Current (Imp)	13.05	13.16	13.27	13.36	13.45
Open Circuit Voltage (Voc)	41.02	41.10	41.18	41.33	41.48
Short Circuit Current (Isc)	13.73	13.79	13.85	13.93	14.01
Module Efficiency (%)	20.39%	20.62%	20.85%	21.08%	21.32%
Maximum System Voltage	DC 1500V				
Maximum Series Fuse	25A				

Tested at Standart Test Conditions (STC): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C


Mechanical Data

Dimensions	1918mm x 1133mm x 35mm
Weight	23.5kg
Frame	Andonized aluminum
Glass	3.2mm ARC, Low iron, tempered glass
Junction Box	IP68 / 3 diodes
Output Cables	4mm ² (IEC), Lenght: 350-1200 mm (vertical)* Cable length may vary depending on the installition method

Dimensions

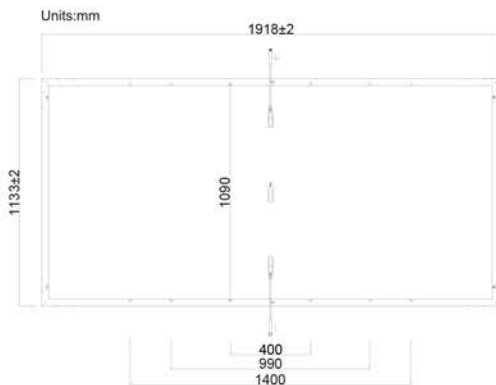

P-V Curve

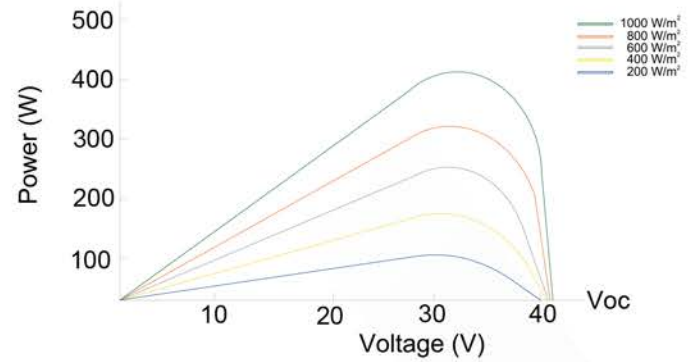

Temperature Characteristics

Pmax Temperature Coefficient	-0.35%/°C
Voc Temperature Coefficient	-0.27%/°C
Isc Temperature Coefficient	+0.05%/°C
Operating Temperature	-40~+80°C
Nominal Operating Cell Temperature (NOCT)	45 ± 2°C

Packing Configuration

Container	40'HQ
Pieces per Pallet	32
Pieces per Container	744

